

WYLER

Our products at a glance

miniCATALOG

2026

Edition 1



簡易型錄

快速介紹我們的產品

www.wylerag.com

WYLER inclination measurement
Precise. Since 1928.



<https://vimeo.com/130540077>



WYLER-Neigungsmesssysteme -
Genau - Seit 1928.




<https://vimeo.com/145365769>

First imagefilm of WYLER AG,
english version 2011



<https://vimeo.com/124147284>

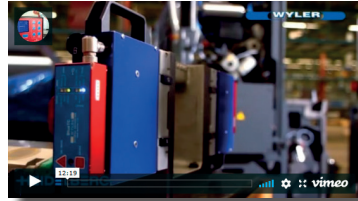

Erster Imagefilm der Firma WYLER AG,
deutsche Version 2011



<https://vimeo.com/124148942>



Excellence Class, Rhaetian Railways Landwasser Viaduct, Switzerland

卓越等級,瑞士Rhaetian鐵路Landwasser高架橋

WYLER-Neigungsmesssysteme -
Genau - Seit 1928 (Kurzfassung Imagefilm)



<https://vimeo.com/181300236>



WYLER inclination measurement -
Precise. Since 1928 (abridged edition)



<https://vimeo.com/180401931>



WYLER傾斜度測量技術：
始自1928的精准
Chinese Version



<https://vimeo.com/190354382>



1928年から角度測定を追求してきた
スイス・ワイラー社
Japanese version




<https://vimeo.com/190354834>



WYLER는 1928년부터 고정밀 경사 측정 기술을 제
공해 왔습니다
Korean version



<https://vimeo.com/190355009>



Система контроля отклонений WYLER:
точность с 1928 года
Russian version



<https://vimeo.com/190355118>



Technologie de mesure de l'inclinaison
WYLER : la précision depuis 1928
French version




<https://vimeo.com/190054490>



Tecnologia di misurazione dell'inclinazione
WYLER: precisione dal 1928
Italian version



<https://vimeo.com/190052687>



Tecnología de medición de la inclinación
WYLER: precisión desde 1928
Spanish version



<https://vimeo.com/190354558>



BlueLEVEL (II)



... are available in various configurations, with radio data transmission.

... 具有不同的設定, 包含無線傳輸.

Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Flatness measurement
- Squareness measurement
- Rotation measurement PITCH and ROLL

主要應用範圍

- 量測物件的精確擺正
- 直線度量測
- 平行度量測
- 平面度量測
- 垂直度量測
- 俯仰度以及滾動度的量測

Sensitivity 靈敏度	Range 量測範圍
/ (mm/m)	/ (mm/m)
0.001	± 20

BlueLEVEL-2D



... combines 2 sensors for 2 axes measurements, with radio data transmission.

結合了2個感測器, 用於2個軸的測量, 並帶有無線電數據傳輸功能.

Main applications

- Precise alignment of objects
- Time saving 2-axis flatness measurement
- Rotation measurement PITCH and ROLL

主要應用範圍

- 量測物件的精確擺正
- 具有雙軸的平面度量測儀器
- 俯仰度以及滾動度的量測



Sensitivity 靈敏度	Range 量測範圍
/ (mm/m)	/ (mm/m)
0.001	± 20

wylerLEVEL Frame



... are available with radio data transmission.

... 可用於無線電數據傳輸.

Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Parallelism of opposite sides
- Flatness measurement
- Squareness measurement
- Rotation measurement PITCH and ROLL

主要應用範圍

- 量測物件的精確擺正
- 直線度量測
- 平行度量測
- 對立面的平行度
- 平面度量測
- 垂直度量測
- 俯仰度以及滾動度的量測

Sensitivity 靈敏度	Range 量測範圍
/ (mm/m)	/ (mm/m)
0.001	± 20

nivelSWISS



... is a standalone measurement instrument.

是單一的量測儀器。

Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Squareness measurements

主要應用範圍

- 量測物件的精確擺正
- 直線度量測
- 平行度量測
- 垂直度量測

Scale graduation 刻度	Range 量測範圍
/ (mm/m)	/ (mm/m)
0.010 / 0.050	± 0.150 / ± 0.750

wylerCLINO Frame 10°



... are available with radio data transmission. Same accuracy worldwide due to built-in gravity compensation.

...適用於垂直測量，並有藍芽傳輸。由於內建重力補償，在全球範圍內具有相同的精度。

Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Parallelism of opposite sides
- Flatness measurement
- Squareness measurements
- Rotation measurement PITCH and ROLL

主要應用範圍

- 量測物件的精確擺正
- 直線度量測
- 平行度量測
- 雙邊平行(方形外框)
- 平面度量測
- 垂直度量測
- 俯仰度以及滾動度的量測

Sensitivity 靈敏度	Limits of error within 12 months* (T _A = 20 °C) 12個月以內的誤差* (T _A = 20 °C)	Range 量測範圍
/ arcsec	/ arcsec	/ °
2	4 + 0.060 % M _w	± 10

M_w = measured value
T_A = ambient temperature
* typical value

M_w = 量測值
T_A = 室溫
* 代表值



wylerCLINO Frame 60°



... are available with radio data transmission. Same accuracy worldwide due to built-in gravity compensation.

...適用於角度及製具，並有藍芽傳輸。由於內建重力補償，在全球範圍內具有相同的精度。

Main applications

- Alignment of objects
- Setting of large inclination angles

主要應用範圍

- 物件的擺正
- 可測量較大的傾角

Sensitivity 靈敏度	Limits of error within 12 months* (T _A = 20 °C) 12個月以內的誤差* (T _A = 20 °C)	Range 量測範圍
/ arcsec	/ arcsec	/ °
5	15 + 0.027 % M _w	± 60

M_w = measured value
T_A = ambient temperature
* typical value

M_w = 量測值
T_A = 室溫
* 代表值



Clinotronic S



... is equipped with radio data transmission. Same accuracy worldwide due to built-in gravity compensation.

...是單一的量測儀器。透過藍芽傳輸,由於內建重力補償,全世界精度都相同。

Main applications

- Alignment of objects
- Setting of large inclination angles

主要應用範圍

- 物件的擺正
- 較大傾角的設定

Sensitivity 靈敏度	Limits of error within 12 months* (T _A = 20 °C) 12個月以內的誤差* (T _A = 20 °C)	Range 量測範圍
/ arcsec	/ arcsec	/ °
5	0.055 % M _w / min. 15	± 45

M_w = measured value
T_A = ambient temperature
* typical value

M_w = 量測值
T_A = 室溫
* 代表值

Clinotronic PLUS



... is a standalone measurement instrument.

...是單一的量測儀器。

Main applications

- Alignment of objects
- Setting of large inclination angles

主要應用範圍

- 物件的擺正
- 可測量較大的傾角

Sensitivity 靈敏度	Limits of error within 12 months* (T _A = 20 °C) 12個月以內的誤差* (T _A = 20 °C)	Range 量測範圍
/ arcsec	/ arcmin	/ °
5	1 ... 2 + 1 digit	± 45
5	1 ... 3 + 1 digit	± 60

T_A = ambient temperature
* typical value

T_A = 室溫
* 代表值

ZEROTRONIC



... sensors are compatible with BlueTC, MultiTC and BlueMETER SIGMA.

... 感測器相容於 BlueTC, MultiTC還有BlueMETER SIGMA.

Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Flatness measurement
- Squareness measurement
- Rotation measurement PITCH and ROLL
- Setting of large inclination angles
- Special measuring-base-adaptions
- Special adaptions, through size, weight or shock resistance

主要應用範圍

- 量測物件的精密擺正
- 直線度量測
- 平行度量測
- 平面度量測
- 垂直度量測
- 俯仰度以及滾動度的量測
- 可測量較大的傾角
- 可搭配特別量測底座
- 根據不同體積、尺寸或防震系數, 可提供特殊治具

Type 型式	Resolution 解析力	Range 量測範圍
	/ arcsec	/ °
ZEROTRONIC 3	0.1 ... 0.7	± 0.5
ZEROTRONIC 3	0.2 ... 0.9	± 1
ZEROTRONIC 3	0.7 ... 7.2	± 10
ZEROTRONIC C	3.2 ... 23.8	± 30
ZEROTRONIC C	3.2 ... 29.2	± 45
ZEROTRONIC C	4.3 ... 54	± 60

Types

ZEROTRONIC

選項



ZEROTRONIC HTR 10° Prisma	ZEROTRONIC HTR 10° Prisma
<ul style="list-style-type: none"> • Cast iron base • Areas beside the measuring faces are nickel plated • Measuring faces are scraped • Housing aluminium • Incl. ZEROTRONIC 3 HTR 10° 	<ul style="list-style-type: none"> • 鑄鐵底座 • 測量面旁的區域鍍鎳 • 表面經過了劃花的處理 • 鋁製外殼 • 包含ZEROTRONIC 3 HTR 10°




wylerZERO Bus HTR 10°	wylerZERO Bus HTR 10°
<ul style="list-style-type: none"> • Stainless steel base • Housing aluminium • Incl. ZEROTRONIC 3 HTR 10° 	<ul style="list-style-type: none"> • 不鏽鋼底座 • 鋁製外殼 • 包含ZEROTRONIC 3 HTR 10°


Modular

ZEROTRONIC

模組

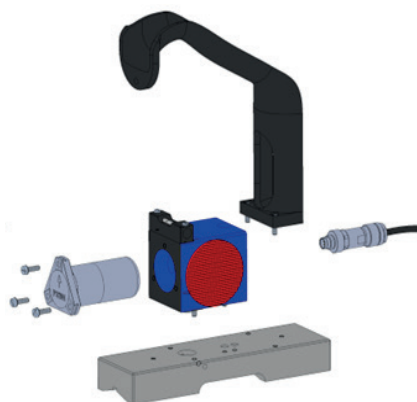

ZEROTRONIC horizontal modular	ZEROTRONIC 水平模組化
<p>To adapt our ZEROTRONIC sensor easily to your application, you can define the combination of sensor and base.</p> <p>Please follow these steps and choose</p> <ol style="list-style-type: none"> 1. ZEROTRONIC sensor according to range and needed HTR compensation 2. a) Mounting block with no more options b) Mounting block with further options at step 3. and 4. 3. Optional handle 4. Type and length of base 5. Accessories 6. Case 	<p>為了讓我們的 ZEROTRONIC 感測器輕鬆適應您的應用, 您可以定義感測器和底座的組合.</p> <p>請依照以下步驟操作並選擇</p> <ol style="list-style-type: none"> 1. 根據量程和所需HTR 補償條件選擇 ZEROTRONIC 感測器 2. a) 無其他選項的安裝區塊 b) 在步驟 3 和 4 中具有更多選項的安裝區塊 3. 底座類型及長度 4. 零件 5. 外箱

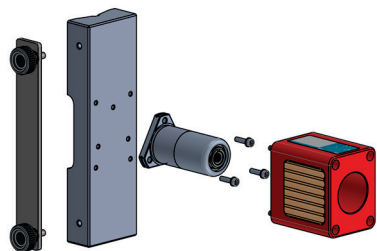

ZEROTRONIC vertical modular	ZEROTRONIC 立式 模組化
<p>To adapt our ZEROTRONIC sensor easily to your application, you can define the combination of sensor and base.</p> <p>Please follow these steps and choose</p> <ol style="list-style-type: none"> 1. ZEROTRONIC sensor according to range and needed HTR compensation 2. Housing with wooden or aluminum inlays 3. Type and length of base 4. Optional side stop 5. Accessories 6. Case 	<p>水平模組包含ZEROTRONIC传感器与底座, 适用于多种应用场景.</p> <p>請按照以下步驟選擇</p> <ol style="list-style-type: none"> 1. 根據量程和所需HTR 補償條件選擇 ZEROTRONIC 感測器 2. 採用木質或鋁製的外殼 3. 底座類型及長度 4. 可選側擋塊 5. 零件 6. 外箱

ZEROMATIC



... sensors are compatible with MultiTC and BlueMETER SIGMA.

...感測器相容於MultiTC還有BlueMETER SIGMA.

Main applications

- Precise alignment of objects
- Long term monitoring of objects in relation to absolute zero position

主要應用範圍

- 量測物件的擺正
- 長時間監控量測物的絕對零點(水平)變化

Zero point limit of error after reversal measurement 零點反向測定誤差	Linearity limit of error within 6 months* 6個月內有限制的線性精度*	Range 量測範圍
/ arcsec		/ °
1	0.5 % M _w	± 1

M_w = measured value
* typical value

M_w = 量測值
* 代表值

BlueMETER SIGMA



... with or without radio data transmission. Can be used as a remote display for

... 擁有藍芽傳輸功能. 可以搭配以下產品, 做為遠端顯示


- BlueLEVEL
- BlueLEVEL-2D
- wylerLEVEL (Frame)
- wylerCLINO (Frame)
- ZEROTRONIC
- ZEROMATIC

- BlueLEVEL
- BlueLEVEL-2D
- wylerLEVEL (Frame)
- wylerCLINO (Frame)
- ZEROTRONIC
- ZEROMATIC

not compatible with BlueLEVEL II

與BlueLEVEL II不相容

LED CROSS



... is very suitable for providing a visual representation of the inclination of a platform.

... 非常適合用於顯示量測面的水平變化.

Typical applications

- Supervision of a crane for goods that are sensitive to inclinations
- Optical aid for manual hydraulic levelling of objects or platforms

典型的應用例

- 監測起重機本身的水平變化
- 光學輔助手動油壓工件或平台的水平調整

wylerCONNECT



... with radio data transmission. Can be used for

... 擁有藍芽傳輸功能. 可以用於

- BlueLEVEL
- BlueLEVEL II
- BlueLEVEL-2D
- wylerLEVEL Frame
- wylerCLINO Frame
- Clinotronic S (wireless only)
- ZEROTRONIC (cable only with MultiTC)
- ZEROMATIC (cable only with MultiTC)

- BlueLEVEL
- BlueLEVEL II
- BlueLEVEL-2D
- wylerLEVEL Frame
- wylerCLINO Frame
- Clinotronic S(僅限無線)
- ZEROTRONIC (僅限接線)
- ZEROMATIC (僅限接線)

MultiTC



... with data transmission by cable. Can be used for

... 以電纜傳輸信號. 可以用於

- ZEROTRONIC
- ZEROMATIC

- ZEROTRONIC
- ZEROMATIC

wylerACCESS



... with wireless data transmission. Can be used for ... 擁有藍芽傳輸功能. 可以用於

- ZEROTRONIC
- ZEROMATIC

- ZEROTRONIC
- ZEROMATIC

BlueTC




... with radio data transmission. Can be used for

... 擁有藍芽傳輸功能. 可以用於

- ZEROTRONIC
- ZEROMATIC

- ZEROTRONIC
- ZEROMATIC

wylerSOFT

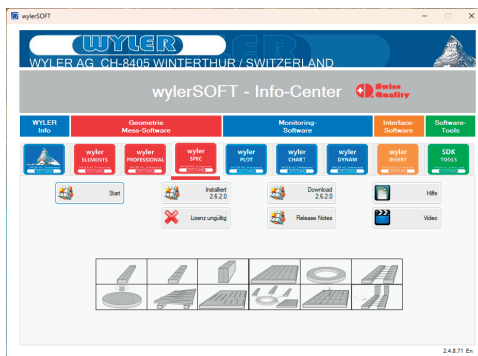

Status of installed software

- License
- Version
- Release notes
- Available download

已安裝軟體的狀態

- 許可證
- 版本
- 軟體版本發佈通知
- 可下載

Support software tool

- wylerLICENSE to check and update all licenses
- wylerEXPLORER to check connectivity of instruments and sensors



支援的軟體工具

- wylerLICENSE 檢測和升級所有許可證
- wylerEXPLORER 檢測儀器和傳感器的連接性能

wylerELEMENTS
wylerPROFESSIONAL
wylerSPEC

Geometry

幾何量測








wylerELEMENTS

- Straightness
- Flatness

wylerELEMENTS

- 直線度
- 平面度















wylerPROFESSIONAL

- Straightness
- Straightness with twist
- Rectangularity
- Flatness
- Rotations

wylerPROFESSIONAL

- 直線度
- 直線度和扭曲
- 垂直度
- 平面度
- 旋轉



wylerSPEC

- Straightness
- Straightness with twist
- Rectangularity
- Flatness
- Circles
- Guide ways
- Vertical spindles
- Rotations
- Parallelism and coplanarity
- Own figures
- Trend
- Combination

wylerSPEC

- 直線度
- 直線度和扭曲
- 垂直度
- 平面度
- 圓形
- 導軌
- 直立式主軸
- 旋轉
- 平行度及共面性測量
- 自行設定測量項目
- 趨勢
- 組合

Monitoring

wylerPLOT
wylerCHART
wylerDYNAM

監控



wylerPLOT

wylerPLOT covers mainly the remote display functionality of the BlueMETER SIGMA.

wylerPLOT

wylerPLOT 包含大部分的BlueMETER SIGMA的顯示功能。




wylerCHART Lite

For up to two measuring channels, wylerCHART runs license-free. This functionality within wylerCHART is called wylerCHART Lite.

wylerCHART Lite

wylerCHART Lite這個功能最多可以有兩個測量通道, wylerCHART 無需許可證即可運行。

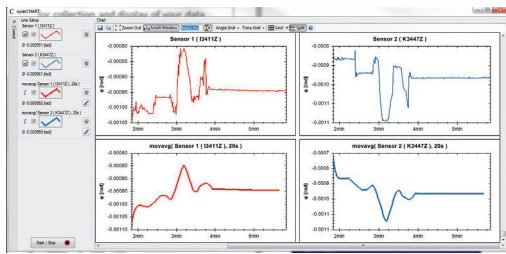

wylerCHART

Collects measuring data from WYLER inclination measuring instruments as ZEROTRONIC sensors. These measuring results can automatically be stored in a csv file and further processed with Excel.

wylerCHART

wylerCHART可以從Wyler的量測儀器(例如ZEROTRONIC sensors)收集數據, 並且自動轉化為CSV檔案, 用於EXCEL讀取及分析。



wylerDYNAM

wylerDYNAM offers a wide range of solutions, adaptable to all measuring tasks. With only a few clicks simple measuring tasks can be started. Thanks to its flexibility also complex measuring tasks can be solved.

wylerDYNAM

wylerDYNAM適用於眾多的量測方案, 只需要簡單的幾個設定即可開始量測, 還可以輕鬆量測複雜的物件。

包含用於測量船舶的平行度的即用型應用程式 SEATRONIC。



Includes the ready to use application SEATRONIC to measure parallelism on vessels.

Interface

wylerINSERT

介面




wylerINSERT

wylerINSERT is an easy to use yet powerful tool to read inclination values from WYLER sensors and measuring instruments to insert them into any program at the current position of the cursor just like the values were typed in.

wylerINSERT


wylerINSERT是簡單但功能強大的軟體, 可以從感應器讀取量測數據, 並傳輸至任意程式中, 就好比這些數據是打字上去的。

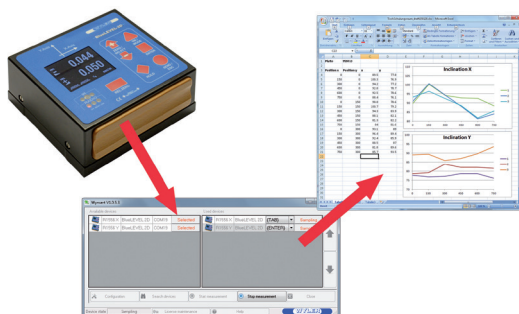

Horizontal spirit level

55 SPIRIT

水平型氣泡水平儀



Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement

主要應用範圍

- 量測物件的精密擺正
- 直線度量測
- 平行度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Smallest 最小尺寸	Length x Width x Height 長x寬x高 / mm	Biggest 最大尺寸
0.02	± 0.06	100 x 32 x 35		300 x 50 x 51
0.05	± 0.15			
0.10	± 0.30			
0.30	± 0.90			

Magnetic spirit level

48 SPIRIT

磁性氣泡水平儀



Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Squareness measurement

主要應用範圍


- 量測物件的精密擺正
- 直線度量測
- 平行度量測
- 垂直度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Length x Width x Height 長x寬x高 / mm
0.02	± 0.06	150 x 40 x 150
0.05	± 0.15	
0.10	± 0.30	
0.30	± 0.90	

Precision frame spirit level

58 SPIRIT

框型氣泡水平儀



Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement
- Parallelism of opposite sides
- Squareness measurement

主要應用範圍


- 量測物件的精密擺正
- 直線度量測
- 平行度量測
- 對立垂直面的平行度
- 垂直度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Smallest 最小尺寸	Length x Width x Height 長x寬x高 / mm	Biggest 最大尺寸
0.02	± 0.06	100 x 32 x 100		200 x 40 x 200
0.05	± 0.15			
0.10	± 0.30			
0.30	± 0.90			

Adjustable spirit level

52

可調式氣泡水平儀



Main applications

- Precise alignment of objects within
- Straightness measurement
- Parallelism measurement

主要應用範圍

- 量測物件的精密擺正
- 直線度量測
- 平行度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Length x Width x Height 長x寬x高 / mm
0.02	0 ... 50 / ± 0.06	200 x 40 x 41
0.05	0 ... 50 / ± 0.15	
0.10	0 ... 50 / ± 0.30	

Adjustable micrometer spirit level

68

可調式分厘卡頭氣泡水平儀



Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement

主要應用範圍

- 量測物件的精密擺正
- 直線度量測
- 平行度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Length x Width x Height 長x寬x高 / mm
0.02	-20 ... 4 / ± 0.06	150 x 45 x 45 (80)

Crankpin spirit level

56

曲面氣泡水平儀



Main applications

- Measurements on pins of crank shafts

主要應用範圍

- 量測金屬棒的曲柄軸

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)		Smallest 最小尺寸	Length x Width x Height 長x寬x高 / mm		Biggest 最大尺寸
	A)	B)		A)	B)	
0.05	± 0.10	± 0.15	60 x 42 x 32	90 x 42 x 32		
0.10	± 0.20	± 0.30				

Shaft spirit level

63

軸棒氣泡水平儀



Main applications

- Precise alignment of objects
- Straightness measurement
- Parallelism measurement

主要應用範圍

- 量測物件的精密擺正
- 直線度量測
- 平行度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Smallest 最小尺寸	Length x Width x Height 長x寬x高 / mm	Biggest 最大尺寸
0.05	± 0.15	100 x 30 x 35	200 x 30 x 35	
0.10	± 0.30			
0.30	± 0.90			

Tubular spirit level

59

管狀氣泡水平儀



Main applications

- Precise alignment of objects
- Straightness measurement

主要應用範圍

- 量測物件的精密擺正
- 直線度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Smallest 最小尺寸	Length x Width / Diameter 長*寬 / 直徑 / mm	Biggest 最大尺寸
0.05	± 0.15	-----	200 x 11 / Ø22	
0.10	± 0.30	80 x 9 / Ø16		
0.30	± 0.90			

Screw-on spirit level

66

可固定型氣泡水平儀



Main applications

- Alignment of objects
- Straightness measurement

主要應用範圍

- 物件的擺正
- 直線度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Smallest 最小尺寸	Length x Width x Height 長x寬x高 / mm	Biggest 最大尺寸
0.10	± 0.20	80 x 15 x 18	150 x 18 x 22	150 x 18 x 22
0.30	± 0.30	60 x 12 x 14		
1.00	± 2.00	50 x 10 x 12	60 x 12 x 14	60 x 12 x 14
2 ... 5	-----	30 x 10 x 10		

Magnetic angle spirit level

47

帶磁鐵的氣泡水平儀



Main applications

- Alignment of objects
- Straightness measurement

主要應用範圍

- 物件的擺正
- 直線度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Length x Width x Height 長x寬x高 / mm
0.30	± 0.90	100 x 30 x 100

Universal angle spirit level

64

通用的角度氣泡水平儀



Main applications

- Alignment of objects (vertical and horizontal)
- Straightness measurement

主要應用範圍

- 物件的擺正 (水平和垂直)
- 直線度量測

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Length x Width x Height 長x寬x高 / mm
0.50	± 1.50	160 x 40 x 150

Cross spirit level

78

交叉型氣泡水平儀



Main applications

- Alignment of objects

主要應用範圍


- 物件的擺正

Sensitivity 刻度 / (mm/m)	Range 量測範圍 / (mm/m)	Length x Width x Height 長x寬x高 / mm
0.02	± 0.06	148 x 147 x 30
0.10	± 0.20	78 x 65 x 17
0.30	± 0.60	

Cross spirit level

76

交叉型氣泡水平儀



Main applications

- Alignment of objects

主要應用範圍

- 物件的擺正

Sensitivity 刻度	Range 量測範圍	Smallest 最小尺寸	Diameter x Height 直徑x高度	Biggest 最大尺寸
/ (mm/m)	/ (mm/m)		/ mm	
0.3	± 0.6	60 x 13		80 x 18
1.0	± 2.0			
2 ... 5	-----	40 x 11		-----

Circular spirit levels

72 / 73 / 74

圓形氣泡水平儀



MOD. 72



MOD. 73



MOD. 74

Main applications

- Alignment of objects

应用领域


- 被测物精密调平

Sensitivity 刻度	Smallest 最小尺寸	Diameter x Height 直徑x高度	Biggest 最大尺寸
/ arcmin		/ mm	
8 ... 12	60 x 17		-----
10 ... 20	16 x 10		30 x 14.5
12 ... 18	40 x 12		50 x 15
20 ... 30	20 x 9		30 x 11

Clinometer

80

角度測量儀

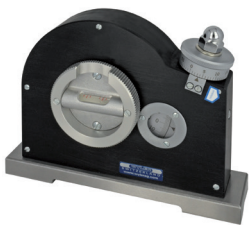

Main applications

- Alignment of objects (vertical and horizontal)
- Checking and setting of inclination angles

主要應用範圍

- 物件的擺正 (水平和垂直)
- 傾斜角的檢查和設定

Sensitivity 刻度	Range 量測範圍	Length x Width x Height 長x寬x高
/ (mm/m)	/ °	/ mm
0.30	± 180	150 x 35 x 116

Communicating water level

77

連通管水平儀



Main applications

- Adjustment of two or more objects to the same level or determine their deviation in height within 0.05 mm

主要應用範圍

- 將兩個或多個物件調整到同樣的水平或確定他們的高度偏差在0.05mm以內

Sensitivity (column) 刻度 (立柱)	Sensitivity (micrometer) 刻度 (游標千分尺)	Diameter x Height (with micrometer) 直徑x高度 (含千分尺)
/ mm	/ mm	/ mm
1	0.01	∅100 x 250 (350)


Granite straight edges

264

花崗岩直規



Granite measuring and setting straight edges with two parallel faces 由花崗岩製成的標準規，具有兩面平行面

Length x Width x Height 長x寬x高 / mm	Weight 重量 / kg	DIN 874-3/000  / μm	WYLER 000  / μm
200 x 30 x 40	0.7	2.6	1.5
500 x 45 x 90	6	5	2.5
750 x 50 x 140	16	7	3.5
1000 x 56 x 160	26	9	4.5
1250 x 60 x 190	42	11	5.5
1500 x 70 x 220	69	13	6.5



Granite measuring squares

265

花崗岩直角規



Granite measuring and setting square with two precise faces 由花崗岩製成的標準規，具有兩個垂直面

Length x Width x Height 長x寬x高 / mm	Weight 重量 / kg	DIN 874-3/000  / μm	WYLER 000  / μm
200 x 50 x 300	6.5	2.5	1.6
250 x 50 x 400	10	3	1.8
300 x 60 x 500	17	3.5	2
400 x 70 x 600	30	4	2.2

SCS certificates and services

服務

Calibration laboratory SCS WYLER AG

SCS

WYLER SCS符合瑞士標準校驗實驗室



High precision inclination measuring instruments have to be tested and recalibrated on a regular base. Our air-conditioned calibration lab is equipped with special high precision measuring and calibration equipment certified by METAS Switzerland. The calibration range for instruments and sensors reaches from very small angles (0.2 arcsec) to the full circle (360°). Our laboratory is equipped to test and calibrate WYLER as well as non-WYLER products.

高精度的水平儀必須在國際規範之下定期進行測試以及校驗。我們的校驗實驗室擁有瑞士國家METAS認證的高精度的校驗設備，對於儀器或是感應器的量測範圍可從最小的角度(0.2 弧秒)到整個圓周(360度)，我們的校驗實驗室可以測試以及校驗任何品牌的產品。

Training

訓練



Basics and product training

- Basics on inclination measurement
- Product training for customers

基礎的產品培訓

- 基本的水平量測觀念
- 提供客戶產品的教育訓練

Innovation, quality, service, sustainability and social responsibility - since 1928.

Further information on WYLER products can be found on our website www.wylerag.com or obtained from one of our distribution partners.

Thank you for your interest in our products.

創新, 品質, 服務, 永續發展與社會責任——自1928年以來

任何的WYLER產品資訊都可以從我們的網站裡找到：www.wylerag.com 或是從全球各地的代理商獲得資訊。謝謝您對我們的產品感興趣。

感谢您对我们的产品的关注。

WYLER AG
Inclination Measuring Systems
Neigungsmesssysteme
Im Hölzlerli 13, 8405 Winterthur, Switzerland
Tel. +41 52 233 66 66
www.wylerag.com | wyler@wylerag.com

Ever Bright Precision Ltd.
台北市內湖區基湖路10巷50號3F
3F Nr. 50, Lane 10, Ji-Hu Road
Nei-Hu District, Taipei City 114, Taiwan
Tel.: +886 2 2659 5586 / Fax: +886 2 2659 5587
www.everbright1976.com | sales@everbright.com.tw